


WATERTIGHT SHIP DOOR

A60 CLASS UP TO 1,5 BAR
TYPE BOH.0345.A60

PURPOSE

The A60 class watertight ship door is designed for mounting in walls of ship's superstructures.

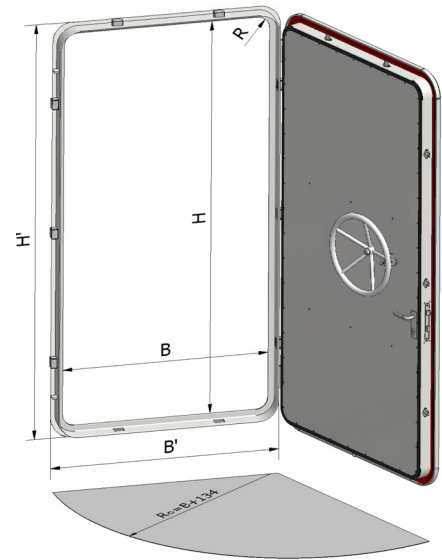

CHARACTERISTICS

The door can be made of steel, aluminum or stainless steel. Pins of closures are settled in bronze sleeves. Hinge pins are made of stainless steel. Hinges have holes for M10x1 grease nipples acc. to DIN 3404 or DIN 71412 M10x1. The door is sealed up with a 40x20 rubber packing cord.

LOCK TYPES


- Z0** – with padlock fastening
- Z5** – with stainless steel MORTISE LOCK AND HANDLE
- Z6** – with stainless steel MORTISE DEAD LOCK
- Z7** – with 5341/8/5390 lock (TrioVing)
- Z8** – with 5312/8/5390 lock (TrioVing)

STANDARD PAINTING

Steel door blade: EPINOX 77 (2x130µm, gray).
Steel door frame: HEMPEL SHOPPRIMER ZS 15809 (15±20µm, gray).
Doors with insulation under cover: EPINOX 77 (2x130µm, gray).
Optional: steel door blade:
primer – HEMPEL HEMPADUR MASTIC 45880/45881 (grey),
topcoat – HEMPEL HEMPADUR MASTIC 45880/45881 (RAL color).
Steel door frame: HEMPEL SHOPPRIMER ZS 15809 (15±20µm, gray).

ACCESSORIES

- H2** – with hook 200 mm long
- H3** – with hook 300 mm long
- SWE** – with external door closer GEZE 4000
- SWI** – with internal door closer GEZE 4000
- DH** – with "Door holder" DIN81406A
- PS** – with inductive proximity switch

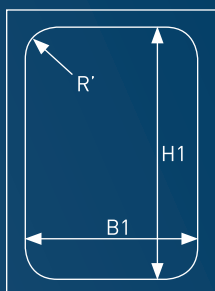



Cut out in bulkhead and overall dimensions acc. coaming type and radius.

coaming / R	R116	R145	overall dimensions
T-bar coaming STT / SST	H1=H+70 B1=B+70 R'=150	-	H'=H+160 B'=B+160
flat bar coaming STP / SSP	-	H1=H+20 B1=B+20 R'=155	H'=H+62 B'=B+62

TECHNICAL SPECIFICATION

1	coaming material	steel (ST)	stainless steel (SS)	-
2	coaming profile	8x80 (P)	T-bar 80x80x8 (T)	-
3	coaming radius	R145 for flat coaming	R116 for T-bar coaming	-
4	door leaf material	steel (ST)	stainless steel (SS)	-
5	opening mechanism material	zincod	stainless steel*	-
6	hinges qty	2 pcs.	3 pcs.*	-
7	surface treatment	standard painting	custom RAL color*	-
8	insulation	60mm thickness mineral wool	-	-
9	window	none	window or scuttle*	window or scuttle with cover*
10	opening direction acc. to ISO 6049	left opening door (LO)	right opening door (RO)	-
11	special purpose	gas tight (G)	-	-

*optional

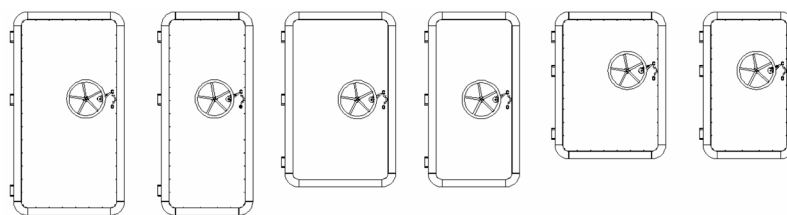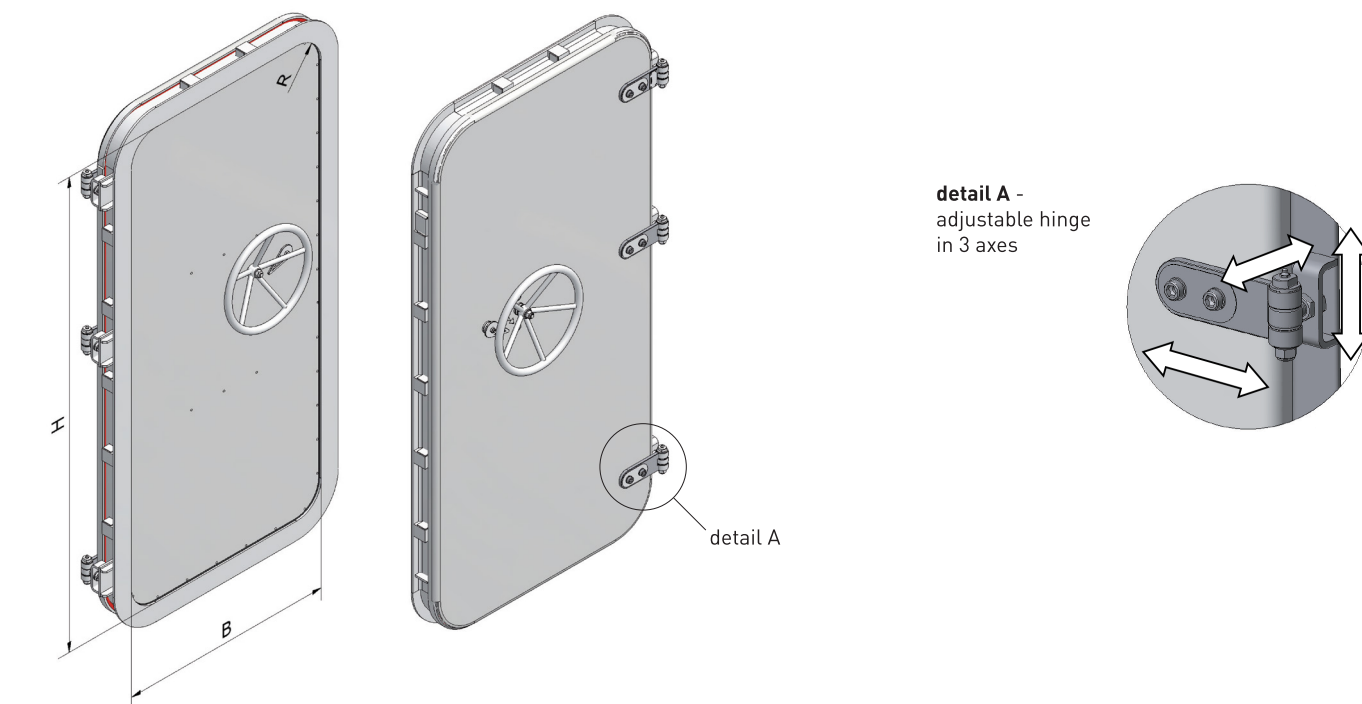

MODEL I
1700 ≤ H ≤ 2000
800 ≤ B ≤ 1000
levers no: 14

MODEL II
1700 ≤ H ≤ 2000
600 ≤ B ≤ 799
levers no: 12

MODEL III
1400 ≤ H ≤ 1699
800 ≤ B ≤ 1000
levers no: 12

MODEL IV
1400 ≤ H ≤ 1699
600 ≤ B ≤ 799
levers no: 10

MODEL V
1000 ≤ H ≤ 1399
800 ≤ B ≤ 1000
levers no: 10

MODEL VI
1000 ≤ H ≤ 1399
600 ≤ B ≤ 799
levers no: 8

When placing an order, please specify the following information in the order given: Product no. – door clear size – opening direction – coaming radius – leaf material – frame material and type – and depending on customer's needs: door finish version – type of lock – accessories

Example:

BOH.0345.A60 – 1800x800-RO-R116-ST-STT-Z5-DH